
[illegible]

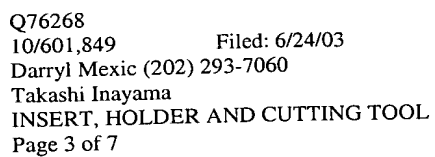

A cross-sectional view of a mechanical assembly. The assembly consists of a main body (1) with a central bore (7). A component (2) is mounted on the left side of the bore, featuring a series of radial fins (2b) and a flange (2a). A component (3) is mounted on the right side of the bore, featuring a flange (3a) and a series of radial fins (3b). A component (4) is mounted on the right side of the bore, featuring a series of radial fins (4a) and a flange (4b). A component (6) is mounted on the right side of the bore, featuring a series of radial fins (6a) and a flange (6b). A component (9) is mounted on the right side of the bore, featuring a series of radial fins (9a) and a flange (9b). A component (2c) is mounted on the right side of the bore, featuring a series of radial fins (2c) and a flange (2c).

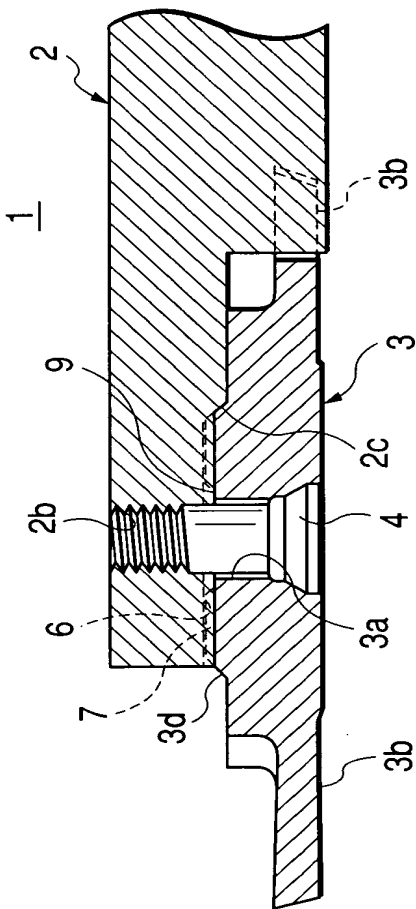


FIG. 5A

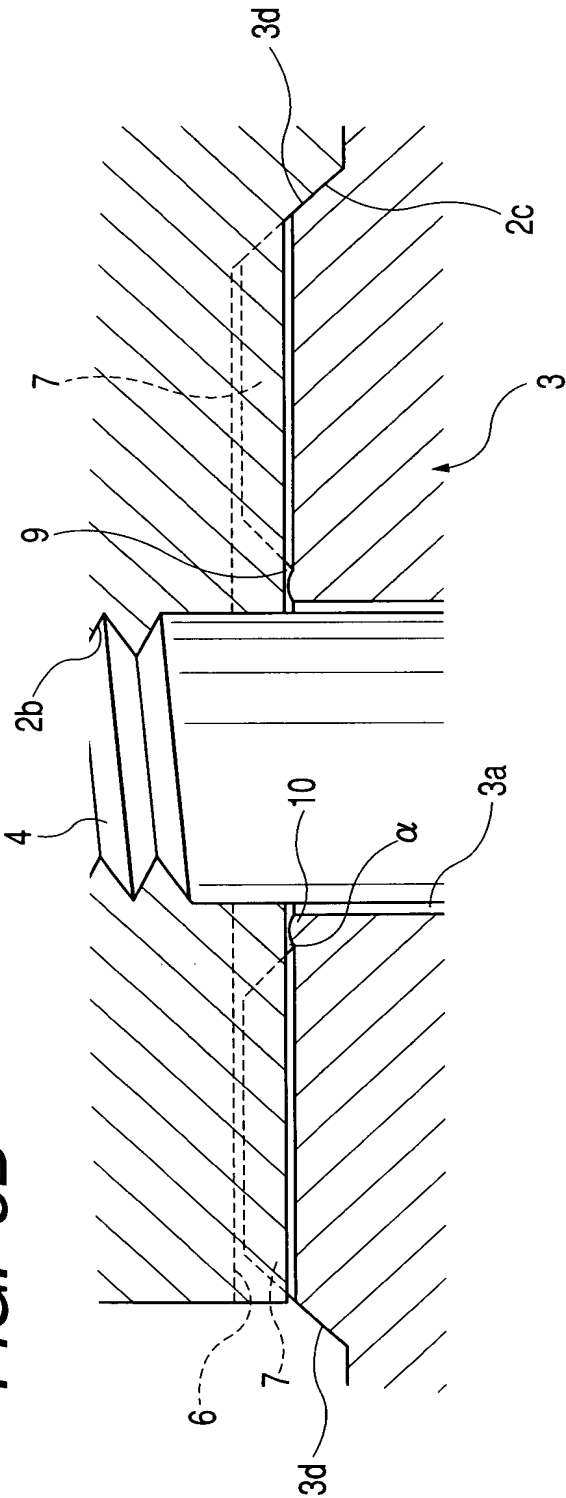
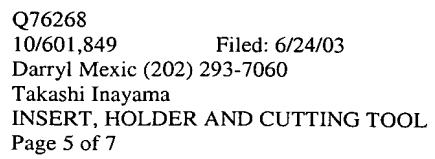
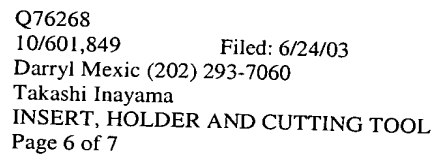


FIG. 5B







**FIG. 8**

